BL1-D2048x1088-160-CL

The board level camera series BL1-D2048x1088(I)-160-CL is derived from the MV1-D2048x1088(I)-160-CL camera series and is in the feature set 100% compatible

Features

- CMOSIS CMV2000 CMOS image sensor
- 2048 x 1088 pixel resolution
- Good NIR spectral response
- Suitable for standard and low light applications
- Up to 70fps @ full resolution
- Global shutter
- Available in monochrome and NIR
- Extended sensor and camera features
- Up to 10bit greyscale resolution
- Camera and OEM solution available
- CameraLink® interface

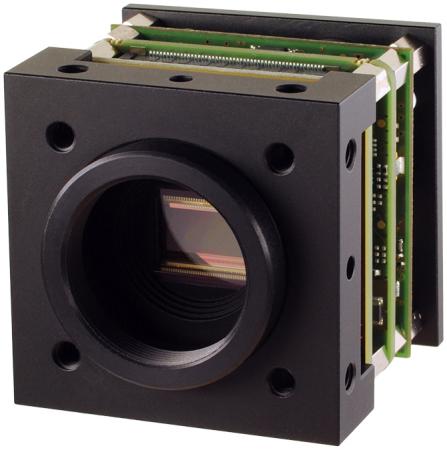

© Photonfocus AG. All rights reserved. This datasheet is subject to change by Photonfocus at any time without any prior notice and Photonfocus cannot be held responsible for any technical or typographical errors.

Quantum Efficiency Image Sensor

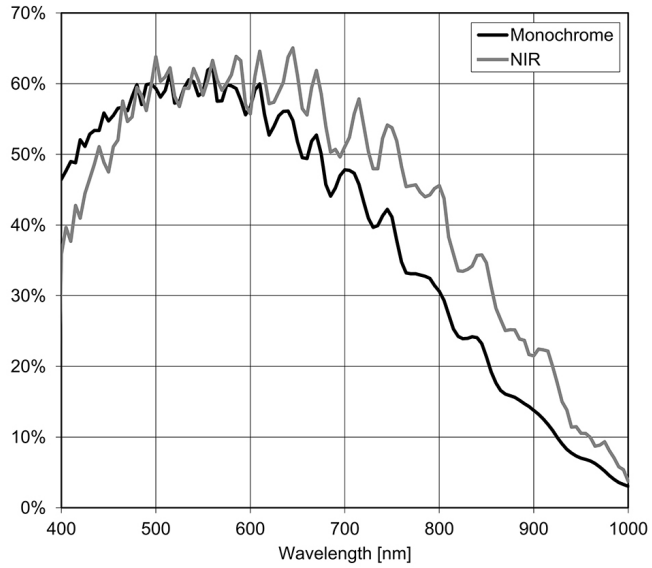

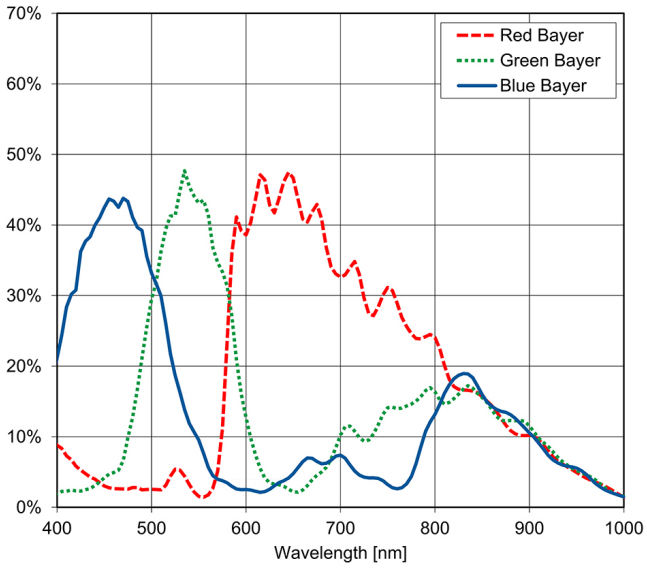

Image Sensor Specifications

Manufacturer / Type	CMOSIS, CMV2000
Technology	CMOS
Optical format	2/3"
Optical diagonal	12.75mm
Resolution	2048 x 1088
Pixel size	5.5µm x 5.5µm
Active optical area	11.26mm x 5.98mm
Dark current	125e-/s
Read out noise	13e-
Full well capacity / SNR	11ke- / 105:1
Spectral range	Monochrome: 350 to 950nm (to 10% of peak responsivity) NIR: 350 to 1000nm (to 10% of peak responsivity)
Responsivity	Monochrome: 1100 x 10^3 DN / (J/m^2) @ 520nm / 8bit NIR: 900 x 10^3 DN / (J/m^2) @ 850nm / 8bit
Quantum Efficiency	Monochrome: < 60% NIR: < 60%
Optical fill factor	42% without micro lenses
Dynamic range	60dB
Characteristic curve	Linear, Piecewise linear
Shutter mode	Global shutter

© Photonfocus AG. All rights reserved. This datasheet is subject to change by Photonfocus at any time without any prior notice and Photonfocus cannot be held responsible for any technical or typographical errors.

Camera Specifications

Interface	Camera Link
Frame rate	70fps
Pixel clock	80MHz
Camera taps	2
Greyscale resolution	8Bit / 10Bit
Fixed pattern noise (FPN)	< 1DN RMS @ 8Bit
Exposure time range	15µs - 419ms
Analog gain	yes
Digital gain	0.1 to 15.99 (FineGain)
Trigger Modes	Free running (non triggered), external Trigger, SWTrigger
Features	Configurable region of interest (ROI), Up to 8 regions of interest (MROI), Decimation in y-direction, 2 look-up tables (12-to-8Bit) on user-defined image region (Region-LUT), Constant frame rate adjustable by software, Crosshairs overlay on the image, Temperature monitoring of camera, Camera informations readable over SDK, Ultra low trigger delay and low trigger jitter, Extended trigger input and strobe output functionality, Status line in picture
Operation temperature / moisture	0°C ... + 50°C / 20% ... 80%
Storage temperature / moisture	-25°C ... 60°C / 20% ... 95%
Power supply	+12VDC (-10%) ... +12VDC (+10%)
Power consumption	< 4.2W
Lens mount	C-Mount (CS-Mount optional)
I/O Inputs	1x Opto-isolated
I/O Outputs	1x Opto-isolated
Dimensions	46 x 46 x 43mm³
Mass	126g
Connector I/O (Power)	Binder 7-pole (mating plug 99-0421-00-07)
Connector Interface	CameraLink Base (MDR)
Conformity	CE / RoHS / WEEE
IP Code	IP20

© Photonfocus AG. All rights reserved. This datasheet is subject to change by Photonfocus at any time without any prior notice and Photonfocus cannot be held responsible for any technical or typographical errors.

Connectors

Pin	I/O Type	Name	Description
1	PWR	CAMERA_PWR	Camera Power 12VDC
2	PWR	CAMERA_GND	Camera GND 0V
3	O	RESERVED	Do not connect
4	PWR	STROBE-VDD	+5 ... +15 VDC
5	O	STROBE	Strobe control (opto-isolated)
6	I	TRIGGER	External trigger (opto-isolated), +5 .. +15VDC
7	PWR	GROUND	Signal ground (for opto-isolated strobe signal)



Dimensions

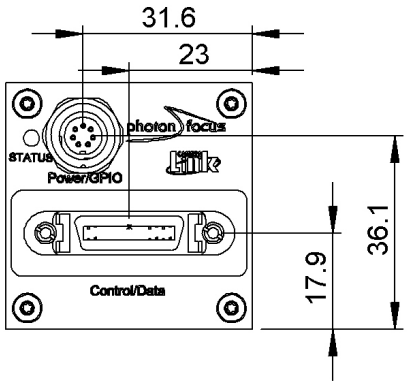

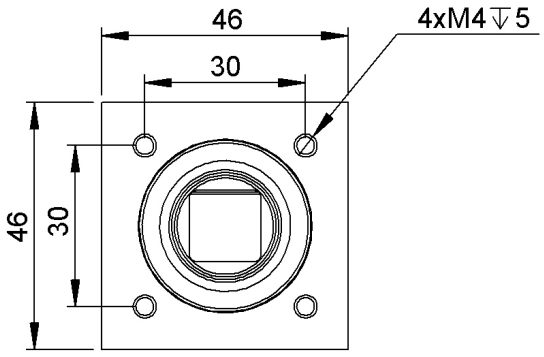

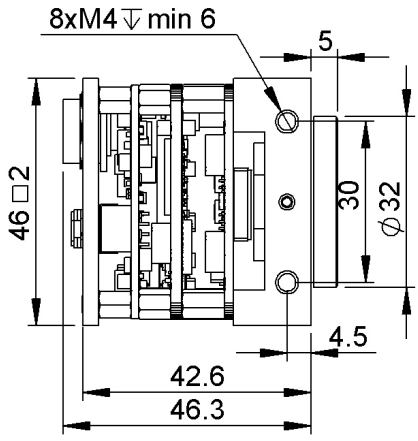

© Photonfocus AG. All rights reserved. This datasheet is subject to change by Photonfocus at any time without any prior notice and Photonfocus cannot be held responsible for any technical or typographical errors.

Explanation

DN DigitalNumber (equals to LSB)

e^- Electrons

Order Information

BL1-D2048x1088-160-CL-10	BW model
BL1-D2048x1088I-160-CL-10	NIR model

Compatibility

Photonfocus AG
Bahnhofplatz 10
CH-8853 Lachen SZ
Switzerland

Phone: +41 55 451 00 00
www.photonfocus.com
info@photonfocus.com

© Photonfocus AG. All rights reserved. This datasheet is subject to change by Photonfocus at any time without any prior notice and Photonfocus cannot be held responsible for any technical or typographical errors.